

BUSOFA

*See current catalogue for further detail



Cleaning Guide:


Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Buffalo socket series flap assembly

- Available as a replacement assembly for installations where rough handling has caused damage to the socket flap and compromising the IP rating.
- Existing flap can be removed through careful unclipping using a small flat blade screwdriver where the clips are shown with the 2 red arrows levering inwards, then as the clips are disengaged, slide the assembly cassette down towards the socket center in the direction of the longer red arrow. Careful not to get fingers in the way as the spring snaps shut.
- The new assembly slotted into place in the location of the sample that was removed and clipped into position.

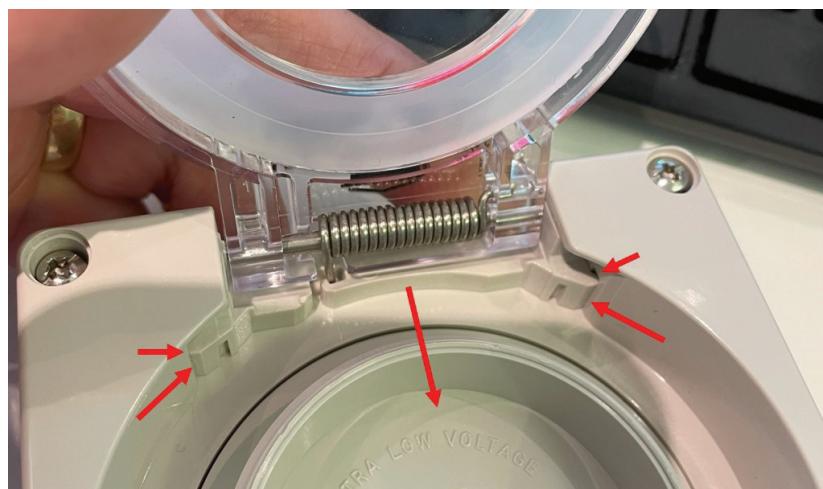

Catalogue Number	Description
BUSOFA	Socket series flap assembly



GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsmeltd.com.au
www.gsmeltd.com.au



Data Specification Sheet
December 2023