

CLPP2GMW
CLPP2GMBK
CLPPSW2GMW
CLPPSW2GMBK
CLPPV2GMW
CLPPV2GMBK

*See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



Clouded Leopard Range of Double Power Points

- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 6mm bore to suit 4 x 2.5mm² cable. Switch terminals have 4.1mm suit 4 x 1.5mm²
- Combination head screws for the power point terminals
- Uses 'Cat Flap' screw covers for IP rating mounting screws
- Dolly indicator colour green
- Power points approved to AS/NZS3112
- Typical example of size seen below:

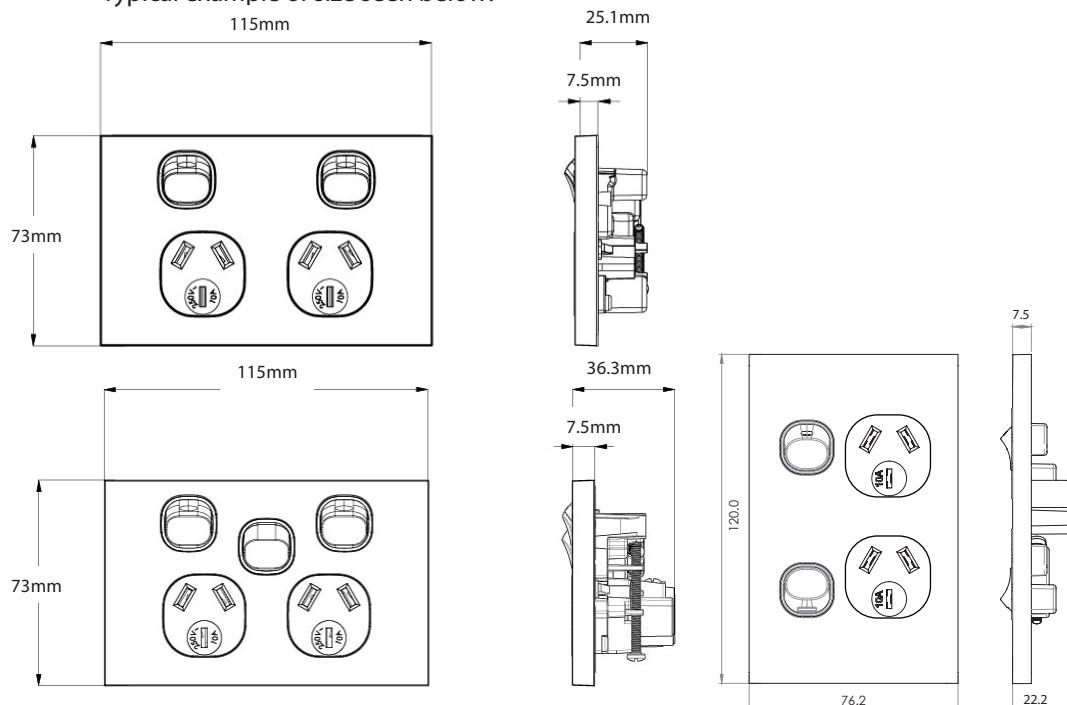

Catalogue Number	Description
CLPP2GMW	Power Point Switched 2 Gang, 10A 250V~ Matt White
CLPPSW2GMW	Power Point Switched 2 Gang, 10A 250V~ with Extra Switch 16AX/20A Matt White
CLPP2GMBK	Power Point Switched 2 Gang, 10A 250V~ Matt Black
CLPPSW2GMBK	Power Point Switched 2 Gang, 10A 250V~ with Extra Switch 16AX/20A Matt Black
CLPPV2GMW	Power Point Vertical Switched 2 Gang 10A 250V~ Matt White
CLPPV2GMBK	Power Point Vertical Switched 2 Gang 10A 250V~ Matt Black



MEERKAT Rocker Switch Mechanisms are used for all switch plates.
 Please refer to Meerkat Rocker Mech Matrix for range compatibility.

Certification Number:

GMA-500348-EA / GMA-500347-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067
 P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au
www.gsme.com.au

