

CBCPPS20 CBCPPS25 CBCPPS32

*See current catalogue for further detail



Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.


Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.




Cobra Range of Conduit Coupling Plain to Screwed

- Colour: Electric Grey
- Material: PVC (Polyvinyl chloride)
- Connector type: Plain to Screwed
- Thread type: M20 M25 & M32x1.5
- Lower / Upper temperature range: -15°C / 60°C
- Product application: Joining plain conduit to threaded entries or fittings. (20mm plain/screwed, 25mm plain/screwed, 32mm plain screw)

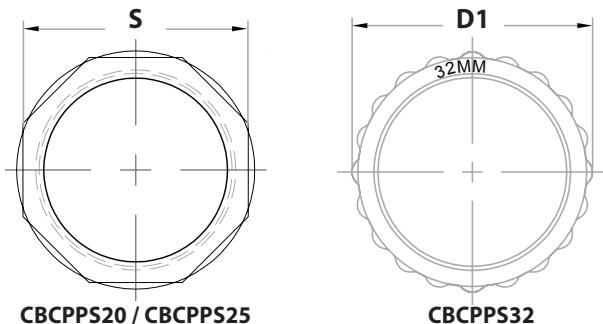

Uses ribbed
tightening grip
instead of nut.

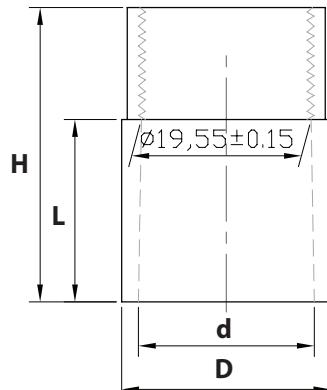

Product Code	Size Spec (mm)	D	d	L	H	S	D1
CBCPPS20	20	24	20	21	34	23	/
CBCPPS25	25	30	25	13	36	28	/
CBCPPS32	32	37	32	29.5	49	/	40

Catalogue Number	Description
CBCPPS20	Coupling Plain to Screwed 20mm PVC Grey
CBCPPS25	Coupling Plain to Screwed 25mm PVC Grey
CBCPPS32	Coupling Plain to Screwed 32mm PVC Grey



GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gmse.com.au

www.gmse.com.au