


NEW CODE	OLD CODE
CBE90HD2045	CBE90MD20
CBE90HD2555	CBE90MD25


Trader Cobra conduit fittings have now been tested and approved for HD applications as per IEC 61386-1: 2008+AMD1: 2017 & IEC 61386-21:2021.

GSM Electrical Trader reserves the right to maintain the MD part codes of previous batches of Trader Cobra Conduit fittings. These products are made and certified to the same standard as their new HD counterparts.

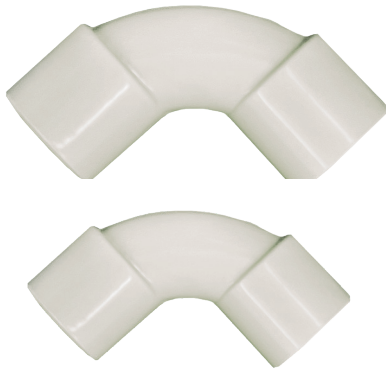

Cobra Range of Elbow 90 Degrees Conduit Connectors

- Colour: Electric Grey
- Material: PVC (Polyvinyl chloride)
- Operating angle 90 degree
- Lower / Upper temperature range: -15°C / 60°C
- Product application: Diameter 20mm & 25mm tube
- Heavy Duty
- Standards: AS/NZS61386.1:2015;
IEC 61386-1: 2008 Part 1: General requirements;
IEC 61386-21: 2002 Part 21: Particular requirements – Rigid conduit systems

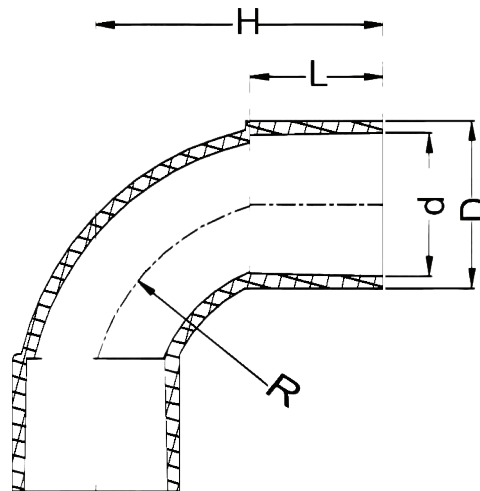

Catalogue Number	Size Spec (mm)	D	d	L	H	R
CBE90HD2045	20	24.8	20.3	19.7	42.39	34.51
CBE90HD2555	25	29.2	25.0	23.2	50.06	38.81

Catalogue Number	Description
CBE90HD2045	Elbow 90 Degrees 20mm 45 Radius Heavy Duty PVC Grey
CBE90HD2555	Elbow 90 Degrees 25mm 55 Radius Heavy Duty PVC Grey

Certification Number:
AS/NZS61386.1; IEC 61386-1; IEC 61386-21; IEC 60670-1

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 E: service@gsm.com.au
www.gsm.com.au



Data Specification Sheet
December 2024