


CBGSCC20L CBGSCC25L

*See current catalogue for further detail



Cobra Range of Straight Glands for Corrugated Conduit

- Colour: Electric Grey
- Material: PVC (Polyvinyl chloride)
- Thread type: M20 & M25
- Thread pitch: 1.5mm
- Device composition: Lock nut
- Installation direction: Straight
- Lower / Upper temperature range: -15°C / 60°C
- Product application: Diameter 20mm & 25mm tube
- Standards: AS/NZS61386.1:2015;
IEC 61386-1: 2008 Part 1: General requirements;
IEC 61386-21: 2002 Part 21: Particular requirements – Rigid conduit systems

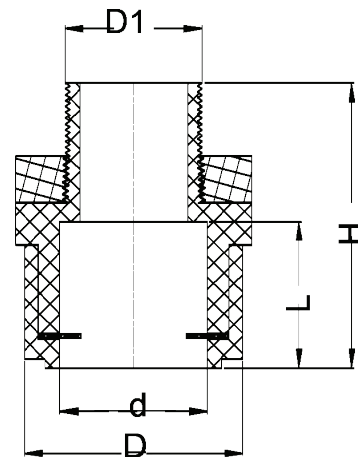

Catalogue Number	Size Spec (mm)	D	d	L	H	d1
CBGSCC20L	20	30.0	20.3	20.0	39	18.8
CBGSCC25L	25	37.0	25.4	26.0	49	23.9

Catalogue Number	Description
CBGSCC20L	Gland Straight 20mm for Corrugated Conduit with Lock Ring PVC Grey
CBGSCC25L	Gland Straight 25mm for Corrugated Conduit with Lock Ring PVC Grey

Certification Number:
AS/NZS61386.1; IEC 61386-1; IEC 61386-21; IEC 60670-1

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 E: service@gsme.com.au
www.gsme.com.au



Data Specification Sheet
April 2023