


**CBR2016  
CBR2520  
CBR3225**

\*See current catalogue for further detail



## Cobra Range of Conduit Connector Plain Reducers

- Colour: Electric Grey
- Material: PVC (Polyvinyl chloride)
- Lower / Upper temperature range: -15°C / 60°C
- Product application: Diameter 16mm, 20mm & 25mm tube
- Standards: AS/NZS61386.1:2015;  
IEC 61386-1: 2008 Part 1: General requirements;  
IEC 61386-21: 2002 Part 21: Particular requirements – Rigid conduit systems

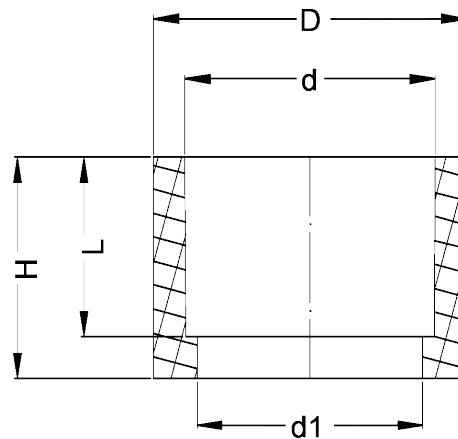

| Catalogue Number | Size Spec (mm) | D    | d    | L    | H    | d1   |
|------------------|----------------|------|------|------|------|------|
| CBR2016          | 20x16          | 20.0 | 16.0 | 18.0 | 21.6 | 13.6 |
| CBR2520          | 25x20          | 25.0 | 20.0 | 22.0 | 24.8 | 17.3 |
| CBR3225          | 32x25          | 32.0 | 25.0 | 22.3 | 27.0 | 22.3 |

| Catalogue Number | Description                               |
|------------------|-------------------------------------------|
| CBR2016          | Reducer Plain to Plain 20mm 16mm PVC Grey |
| CBR2520          | Reducer Plain to Plain 25mm 20mm PVC Grey |
| CBR3225          | Reducer Plain to Plain 32mm 25mm PVC Grey |

**Certification Number:**  
AS/NZS61386.1; IEC 61386-1; IEC 61386-21; IEC 60670-1

**GSM Electrical (Australia) Pty Ltd**  
Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
P: 1300 301 838 E: service@gsm.com.au  
[www.gsm.com.au](http://www.gsm.com.au)



Data Specification Sheet  
April 2023