

**COAC32SO**  
**COAC32PL**

\*See current catalogue for further detail



**Cleaning Guide:**

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.


Do not wash the cover plates in water over 60°C.



**Appliance Coupler Plug and Socket**


**COAC32SO**

- Rating: 250V a.c. 32A
- Dimensions: 116 x 76 x 43 mm
- Standards: AS/NZS 3131 and AS/NZS 3100
- Approval number: GMA-524664

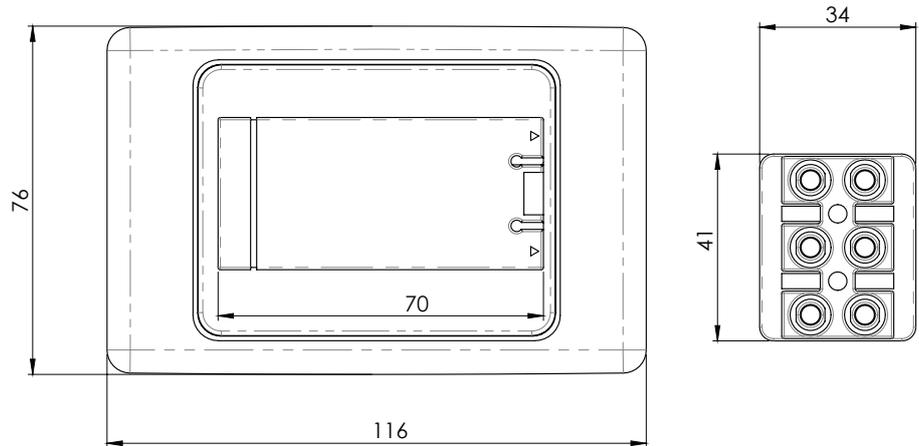

**COAC32PL**

- Plug rating: 250V a.c. 32A
- Standards: AS/NZS 3131 and AS/NZS 3100
- Plug approval number: GMA-524663
- Cable rating: 250V/440V, V-90HT, Ordinary duty
- Cable dimensions: 3G 4.0mm<sup>2</sup>, 1.8m length
- Cable standard: AS/NZS 3191
- Cable approval number: SAA251289

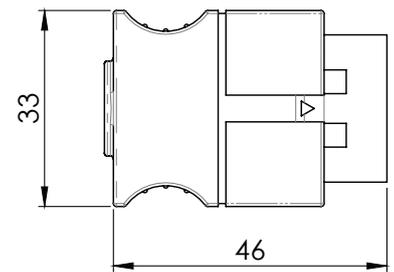

Catalogue Number	Description
COAC32SO	Appliance Coupler Socket Outlet 32A 250V ac White
COAC32PL	Appliance Coupler Plug V-90HT Ordinary Duty 32A 250V ac H05VV-F 3G4.0mm <sup>2</sup> Lead 1.8m White

**GSM Electrical (Australia) Pty Ltd**

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsm.com.au

[www.gsm.com.au](http://www.gsm.com.au)

