COPP2USB2G
COPP2USB2GBK
COPP2USB2GAC
COPP2USB2GACBK
COPP2USB2GCC
COPP2USB2GCCBK

*See current catalogue for further detail
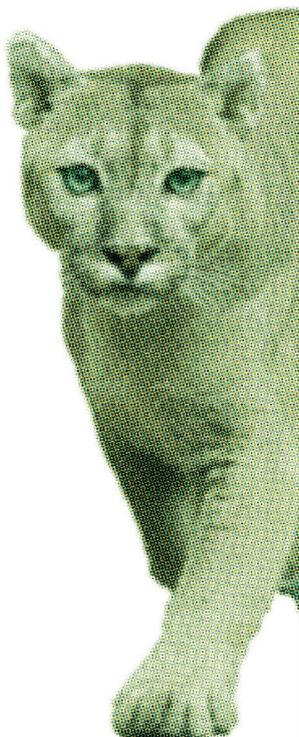
Page 2 of 2

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.
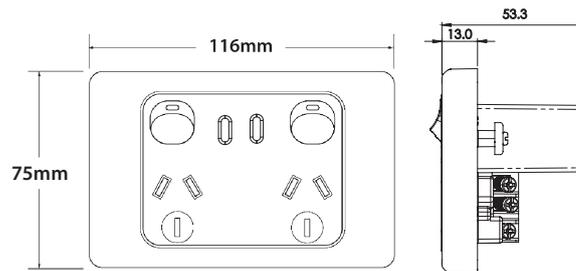
Do not wash the cover plates in water over 60°C.

Cougar Range of USBs

COPP2USB2GCC

- Switch socket rated 10A 250V ac.
- Suitable for USB C applications and performs with the following characteristics:
- USB input 230-240V ~; 50Hz; max 0.5A
- USB-C1 (left output port) C2 (right output port)
- USB-C1 output: DC 5V/3A: DC 9V/3A: DC 12V/2.5A: DC 15V/2A: DC 20V1.5A: PD 30W max.
- USB-C2 output: DC 5V/3A: DC 9V/3A: DC 12V/2.5A: DC 15V/2A: DC 20V1.5A: PD 30W max.
- USB-C1 +C2 output: USB-C1: DC 5V/3A: DC 9V/3A: DC 12V/1.67A: PD 20W max + DC 5V/2A max.
- Socket tested in accordance with AS/NZS 3112.
- USB tested in accordance with IEC61558-2-16 and AS/NZS 61558.1.
- Not suitable for laptops requiring larger power requirement.
- Fits wall boxes and mounting accessories.
- Surround and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colours are white and black.

Catalogue Number	Description
COPP2USB2GCC	Power Point Switched 2 Gang 10A 250V ac With USB Charger Dual Integrated Type C PD20W LHS and 5V 2A 10W RHS or Single PD30W White
COPP2USB2GCCBK	Power Point Switched 2 Gang 10A 250V ac With USB Charger Dual Integrated Type C PD20W LHS and 5V 2A 10W RHS or Single PD30W Black

Data Specification Sheet
September 2025