


FLPP4G FLPP4GBK FLPP4GMW FLPP4GMBK

*See current catalogue for further detail

Flat Cat Range of 4 Gang Power Points

- 183mm mounting centers
- Supplied 2 gang wall bracket
- Pre-wired with a 240mm cable loop for easy installation to suit 1 power circuit
- 5mm thick
- Single Pole switched
- 10A 250V
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Approved to AS/NZS3112.
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power Point terminals have 5.8mm bore to suit 4 x 2.5mm² cable.
- Standard colour is White. Also available in Matt White, Black and Matt Black
- please check availability

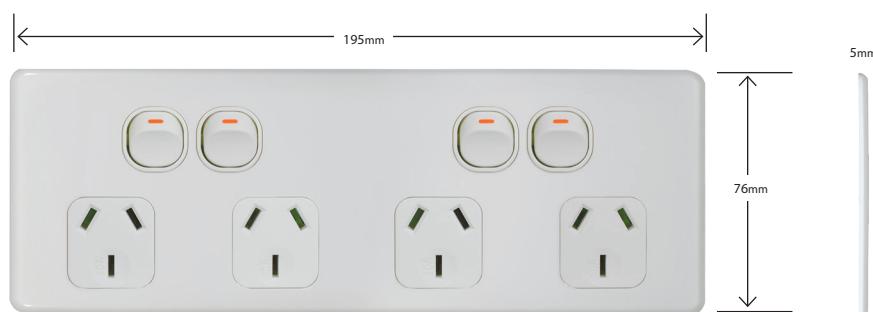

Cleaning Guide:


Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.

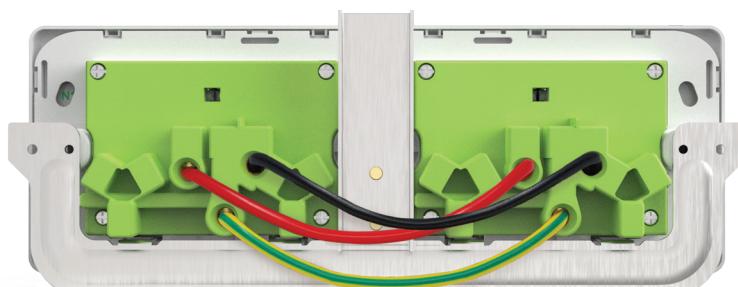

Catalogue Number	Description
FLPP4G	Power Point Switched 4 Gang 10A 250V~ Flush Mount with Custom Mounting Bracket
FLPP4GBK	Power Point Switched 4 Gang 10A 250V~ Flush Mount with Custom Mounting Bracket Black
FLPP4GMW	Power Point Switched 4 Gang 10A 250V~ Flush Mount with Custom Mounting Bracket Matt White
FLPP4GMBK	Power Point Switched 4 Gang 10A 250V~ Flush Mount with Custom Mounting Bracket Matt Black

Certification Number:
GMA-502069-EA

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gmse.com.au
www.gmse.com.au

