


FLSWVA1G FLSWVA2G

*See current catalogue for further detail

Flat Cat Range of Architrave Switches

- Switches are rated 10AX/16A 250V~
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm² cabling with 4.1mm bore
- Slotted head screws for the terminals
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is White. Black, Matt White and Matt Black also stocked
 - please check availability
- Approved to AS/NZS3133
- Typical example of size seen below:

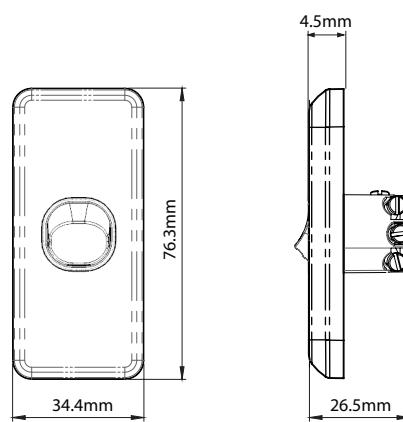

Cleaning Guide:



Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.

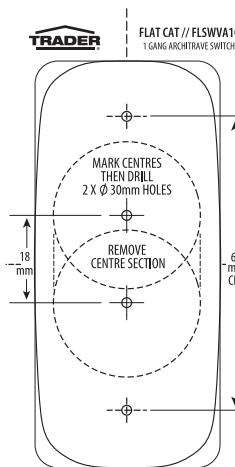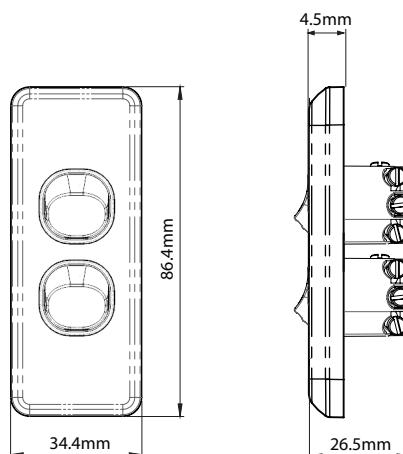

example of cutting template supplied

FLSWVA1G

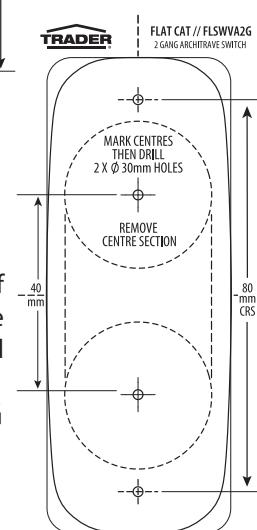

example of cutting template supplied

FLSWVA2G

Catalogue Number	Description
FLSWVA1G	Switch Vertical Architrave 1 Gang, 10AX/16A 250V~
FLSWVA2G	Switch Vertical Architrave 2 Gang, 10AX/16A 250V~

When ordering BLACK product add "BK" at end of catalogue number, ie FLSWVA1GBK

When ordering MATT WHITE product add "MW" at end of catalogue number, ie FLSWVA1GMW

When ordering MATT BLACK product add "MBK" at end of catalogue number, ie FLSWVA1GMBK



MEERKAT Switch Mechanisms are used for all switch plates.
Please refer to Meerkat Mech Matrix for range compatibility.

Certification Number:
GMA-508434-EA

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 E: service@gmse.com.au
www.gmse.com.au

