

Light Dimmer



Data Sheet

Features

- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Switch terminals have 4mm bore to suit 1.5mm² cable.
- Screw caps included to cover mounting screws.
- Mini indicator displays the brightness level.
- Trailing edge dimmer.
- Supports 2 wire (no neutral) via selector switch.
- Master & slave switch for 2 & 3 way dimming.
- Covers, plates and buttons are made from UV stabilised polycarbonate to avoid discolouring.
- Bluetooth mesh connectivity with each device acting as a repeater.
- 2 year warranty.


- Soft touch button and dimming control.
Press for on/off
Hold for dimming
Double press for full brightness
Triple press for a timed fade to off.
- Auto off timers.
- Real time energy use in watts & dollars.
- Automatic schedules.
- Power outage recovery.
- Night light on/off and auto dim.
- Min and max dimming levels for increased compatibility without flicker.
- Voice control with your favourite voice assistant.*

Learn more at www.zimi.life.

Specifications

Product Code	Colour	Description	
PMPUSWV1GS	White	Powermesh Light Dimmer	
PMPUSWV1GSBKS	Black		

Dimensions (mm)

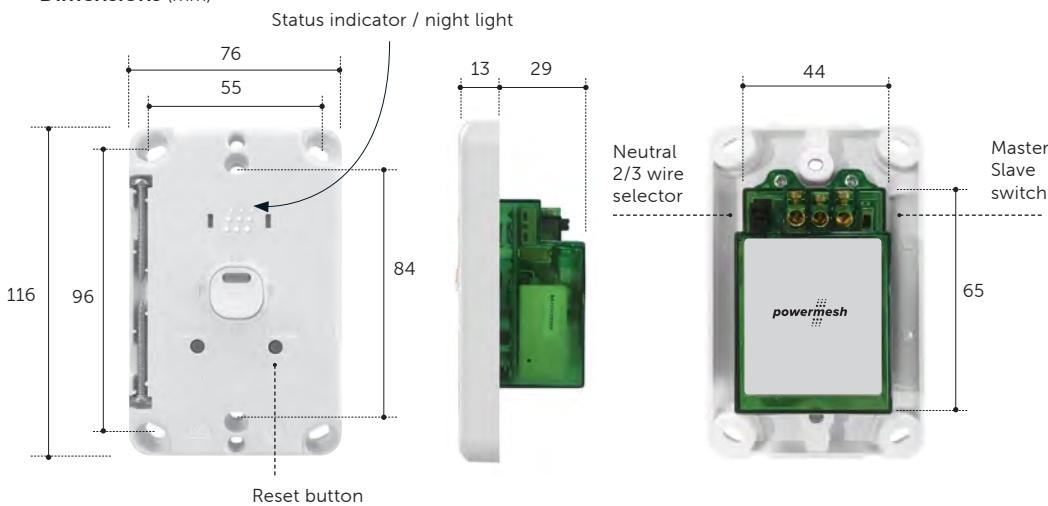

Compatible load types

- Dimmable LED drivers & lamps
- 12V electronic transformers
- Standard iron core & toroidal transformers
- Incandescent



14 Millennium Circuit, Helensvale,
QLD 4212 Australia. www.zimi.life

Need help?

email support@zimi.life
visit <https://support.zimi.life>



PMPUSWV1GS



PMPUSWV1GSBKS

Standards Approval:

AS/NZ60669.2.1 & AS/NZS CISPR15

Certification Number:

GMA-504509-EA



Download Zimi

Scan the code with
your phone camera
to download.



* Zimi Cloud Connect

Enjoy the complete
experience of all
your Zimi devices
with full functionality,
reliable connectivity
and energy history.

