

## SCDL2



Interchangeable shells available:

**SCDL2SSV**

(Shell - Silver)

**SCDL2SBK**

(Shell - Black)



### Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.





## Scorpion LED Downlight 8W

- Dimmable
- Colour Selectable - CCT 3 (see chart)
- Body colour is green
- Shell standard colour is white
- Interchangeable shells available in Black (SCDL2SBK)
- IC-4 rated can be covered and abutted - See instructions
- Flex and Plug - cable length 1.2 metres for easier installations
- Integrated driver
- Diffused lens
- Warranty covers 5 Years Residential & 3 Years Commercial

### Product Specification

Part Code	SCDL2
Colour Temp	3000K 4000K 5700K
<b>Lumen Output</b>	<b>750lm</b>
IP Rating	IP44 (from front only) IP20 (from rear)
Power	8W
Beam Angle	110°
CRI	>85
Voltage Rating	220-240V~ 50Hz
LED Lamp Life (L70)	30,000 Hrs
Dimmable	Yes
Operating Temp	-10°C to 40°C (IC-4@ ta 25°C)
Electrical Class	Class II

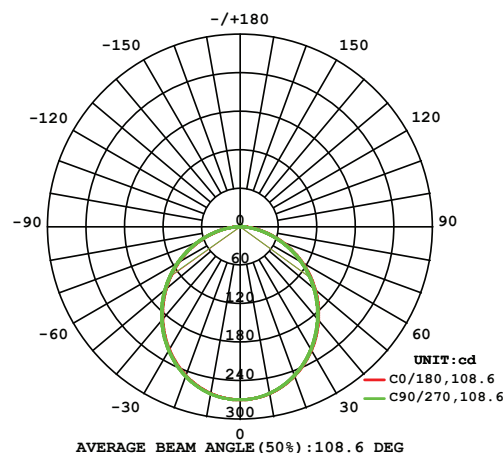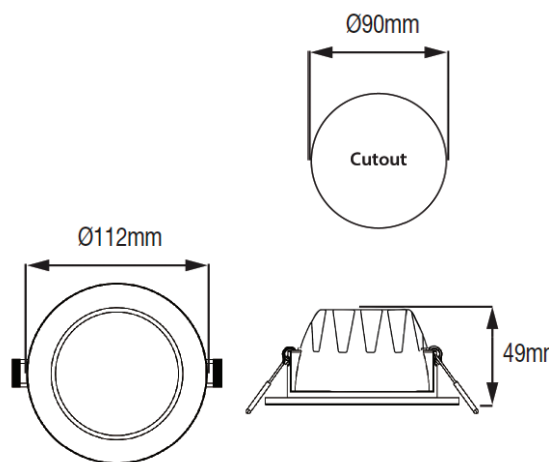

### Dimming

The Scorpion Downlights have been designed for optimum performance with our Dimpala range of dimmers:

DIMR - Dimpala Universal Eclipse Dimmer // DIMPRX - Dimpala Push Rotary Dimmer No Glow // DIMPR - Dimpala Push Rotary Dimmer

Please refer to our Website or Catalogue for further detail and accessories

*Note: In some regions a slight flicker may occur when the luminaire is dimmed. This could be due to power line signals sent by electricity supply utilities. This effect is not a malfunction of the luminaire or dimmer but could be a result of local power supply changes. If this occurs at any stage adjusting the dimmer back to maximum output should minimise the effect.*

### Certification Number:

GMA-517509

### GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

[www.gsme.com.au](http://www.gsme.com.au)



Data Specification Sheet  
May 2024