

## SCFL20F



### Cleaning Guide:

It is important to ensure that product is turned off before cleaning.

Do not use any cleaning sprays - only wash down with damp cloth or mild detergent, and lightly hose off.

(Do not use an abrasive cloth as it may damage the surface finish).



Do not use harsh chemical cleaners as these may damage the surface coating.

## Scorpion LED Floodlight, Frameless SCFL20F


### Product Specification

|   |                        |
|---|------------------------|
| Part Code   | SCFL20F                |
| <b>Lumen Output</b>                                   | <b>1800lm</b>          |
| Power   | 20W                    |
| Weight  | 0.572kg                |
| Voltage Rating  | 220-240V~ 50Hz         |
| Colour Temp   | 4000K                  |
| <b>IP Rating</b>                                      | <b>IP65</b>            |
| LED Lamp Life (L70)                                   | 20,000Hrs              |
| Beam Angle  | 110°                   |
| CRI   | >70                    |
| Cable Length  | 900mm                  |
| Operating Temp  | -10°C to 40°C ta. 40°C |
| Electrical Class                                      | Class I                |
| Product colour  | Black                  |
| Fascia colour   | Black with black frame |
| Installation  | Locking hinge bracket  |
| <b>Warranty</b>                                       | <b>Two (2) Years</b>   |
| Dimensions<br>L x W x H (mm)<br>(refer diagram below) | 163 x 29 x 118         |

### Typical Mounting Options

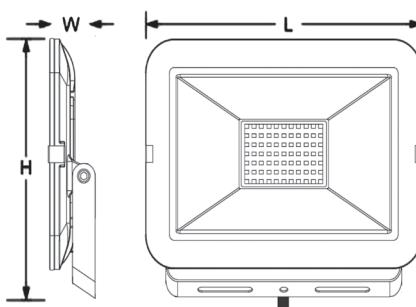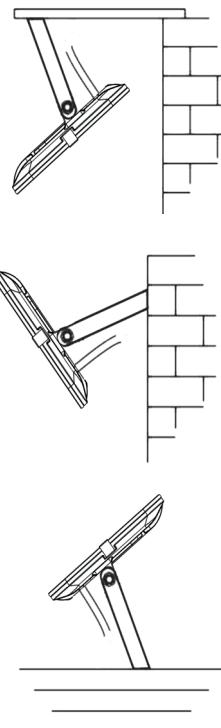

### Photometric B Plane Distribution Diagram

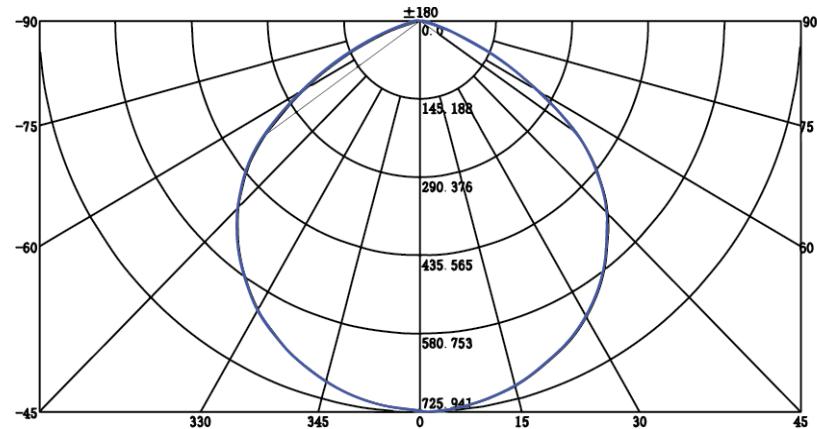

### Certification Number:

GMA-516004

**GSM Electrical (Australia) Pty Ltd**

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gmse.com.au

[www.gmse.com.au](http://www.gmse.com.au)

