

SCFL50F



Cleaning Guide:

It is important to ensure that product is turned off before cleaning.

Do not use any cleaning sprays - only wash down with damp cloth or mild detergent, and lightly hose off.

(Do not use an abrasive cloth as it may damage the surface finish).

Do not use harsh chemical cleaners as these may damage the surface coating.

Scorpion LED Floodlight, Frameless SCFL50F

Product Specification

Part Code SCFL50F

Lumen Output 4500lm

Power 50W

Weight 1.100kg

Voltage Rating 220- 240V~ 50Hz

Colour Temp 4000K

IP Rating IP65

LED Lamp Life (L70) 20,000Hrs

Beam Angle 110°

CRI >70

Cable Length 900mm

Operating Temp -10°C to 40°C ta. 40°C

Electrical Class Class I

Product colour Black

Fascia colour Black with black frame





Installation Locking hinge bracket

Warranty Two (2) Years


Dimensions

L x W x H (mm)
(refer diagram below)

Typical Mounting Options

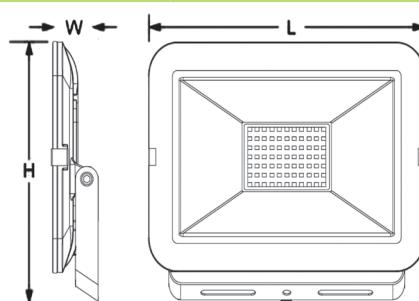

Photometric B Plane Distribution Diagram

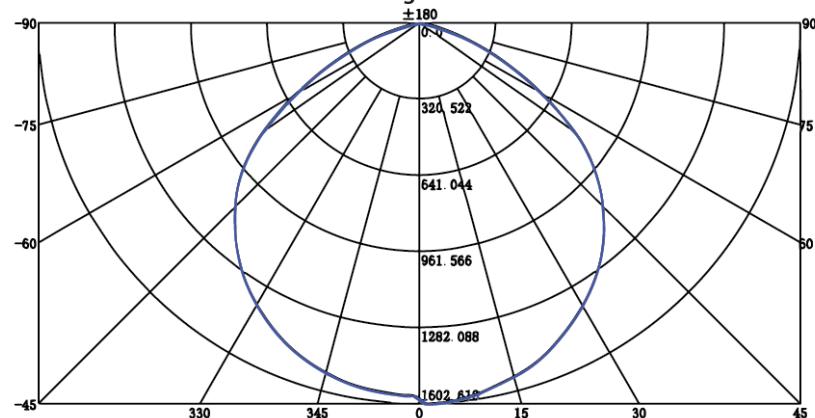

Certification Number:

GMA-516004

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gmse.com.au

www.gmse.com.au

