

SCPSWL




Cleaning Guide:

Clean the product with a soft, dry cloth. Do not use any form of abrasive cleaner or solvents to clean the unit. Never dip product into liquids.

Power Station With Light

OUTPUT		
AC Output	Rated Voltage	AC 240V
	Rated Power	300W Max
	Frequency	50Hz
	Output Wave	Pure Sine Wave
DC Output	Rated Voltage	12~13V
	Rated Current	8~10A
QC 3.0 Output	Rated Power	18W
Type-C Output	Rated Power	PD:100W
USB Output	Rated Voltage	5V
	Rated Current	2.1A
Floodlight	Rated Power	7W
INPUT		
DC Input	Rated Voltage	15A
	Rated Current	5A
Type-C Input	Rated Power	PD:100W (Max)
BATTERY		
Rated Capacity	14.4V/20Ah/288Wh	
Battery Cell Type	NMC	
GENERAL		
Working Environment Condition	Charging Temperature: 0~45°C	
	Discharge Temperature: -10~45°C	
Size	225*121*200mm±5mm	

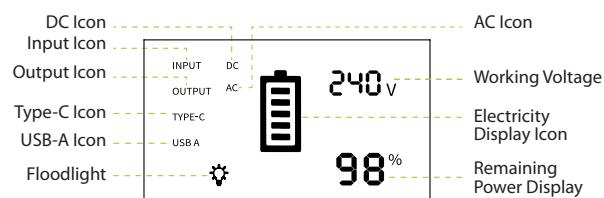

Electrical Charging

	Phone (4000mAh) Around 17 Recharges		Camera (35W) Around 7 Recharges
	Notebook Computer (110W) Around 2.2 Hours		Rice Cooker (280W) Around 0.9 Hours
	Car Fridge (80W) Around 3.1 Hours		Kettle (260W) Around 0.9 Hours
	Camping Lamp (125W) Around 1.9 Hours		Projector (110W) Around 2.2 Hours
	Refrigerator (130W) Around 1.9 Hours		Electric Fan (55W) Around 4.4 Hours
	Drone (50W) Around 4.9 Recharges		Electric Drill (220W) Around 1.1 Hours

Charging Mode

Before using this energy storage power supply, ensure it is fully charged. If the LED shows less than 20% capacity, connect it to a power source through DC input or Type-C input port for recharging as soon as possible.

There are two ways to recharge your Power Station.

DC Input:

 AC Wall Charger (60W)
Around 5.5 Hours  100W Solar Panels
Around 3.6 Hours

 Car charger to DC*5521 (60W)
Around 5.5 Hours

Type-C Input:

 Type-C (PD100W MAX)
Around 3.5 Hours



GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gmse.com.au
www.gmse.com.au

