

## SCSPSENSOR SCSPSENSORBK





### Cleaning Guide:



Clean the product with a soft, dry cloth. Do not use any form of abrasive cleaner or solvents to clean the unit. Never dip product into liquids.

## Scorpion Sensor for Twin Spotlight (SCSP24TWIN and SCSP24TWINBK)

- Lux Setting: <10-2000Lux (adjustable)
- Time delay: 10sec (±3sec) – 12min (±3min)
- 2-12m Detection zone (adjustable)
- 180° Detection zone
- 0.6 – 1.5m/s Detection Speed
- Recommended Installation height: 1.8-2.5m
- **IP Rating: IP54**  
*Note: Sensor is IP54 rated once correctly installed as per instructions.*
- Available in White and Black
- Compatible as an upgrade for SCSP24TWINBK

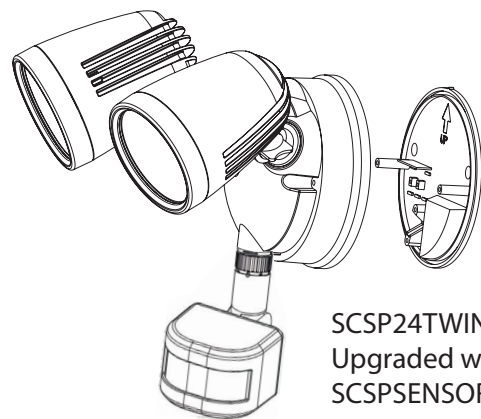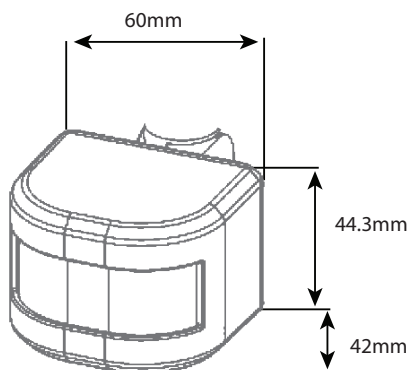

SCSP24TWIN/BK  
Upgraded with  
SCSPSENSOR/BK

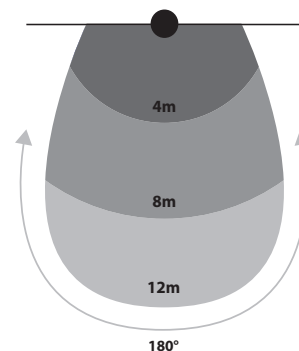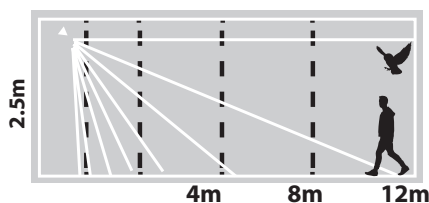

Catalogue Number	Description
SCSPSENSOR	Motion Sensor Passive Infrared Adaptor for SCSP24TWINBK 12m Detection Time Sensitivity and Lux Adjustable
SCSPSENSORBK	Motion Sensor Passive Infrared Adaptor for SCSP24TWINBK 12m Detection Time Sensitivity and Lux Adjustable Black

### Certification Number:

GMA-515501

**GSM Electrical (Australia) Pty Ltd**

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

[www.gsme.com.au](http://www.gsme.com.au)



Data Specification Sheet  
April 2024

