


SENPPSW2G
SENPPSW2GBK



Senoa Simple Double Power Points With Standard Rocker Switches & Removable Extra Switch

- Socket outlets approved to AS/NZS 3112. Switches approved to AS/NZS 60669-1.
- Wall plate 10mm thick to align with other Senoa products in the range.
- Glass look fascia to compliment Senoa range.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 6mm bore to suit 4 x 2.5mm² cable wire. Switch terminals have 4.1mm suit 4 x 1.5mm² cable wire.
- Combination head screws for the socket terminals.
- Uses integral 'Cat Flap' screw covers for mounting screws.
- Green dolly indicator colour
- Covers plates are made from UV resistant polycarbonate
- Standard colour is White. Also available in Black.
When ordering BLACK product add "BK" at end of catalogue number, ie SENPP2GBK
- Typical example of size seen below:

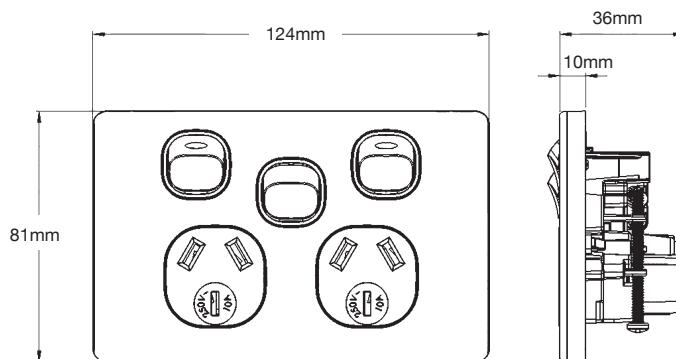

Catalogue Number	Description
SENPPSW2G	Power Point Switched 2 Gang 10A 250V~ with Removable Extra Switch White 10AX/16A
SENPPSW2GBK	Power Point Switched 2 Gang 10A 250V~ with Removable Extra Switch Black 10AX/16A

Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic). Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack. Do not wash the cover plates in water over 60°C.

When ordering BLACK product add "BK" at end of catalogue number, ie SENPPSW2GBK

Certification Number:
TBC

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsmeltd.com.au
www.gsmeltd.com.au