

## Data Sheet

### Features

- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Combination head screws with a 6mm bore to suit 4 x 2.5mm<sup>2</sup> cable (screws backed out for easier installation of cabling).
- Screw caps included to cover mounting screws.
- LED indicator lights up when switched on.
- Soft touch button activation.
- Covers, plates and buttons are made from UV stabilised polycarbonate to avoid discolouring.
- Silverfish antenna technology.
- Bluetooth mesh connectivity with each device acting as a repeater.
- 2 year warranty.
- Real time energy use in watts & dollars.
- Automatic schedules.
- Auto off timers.
- Power outage recovery.
- Power lock.
- Individual socket control.
- Night light on/off and auto dim.
- High energy use alert.
- Voice control with your favourite voice assistant.\*


Learn more at [www.zimi.life](http://www.zimi.life)

### Specifications

Product Code	Colour	Description	Max Load Rating	Line Voltage Freq.
PMPP	White	Powermesh Power Point Switched 2 Gang	10A @ 250V~ 2500W	50Hz Nominal
PMPPBK	Black			

### Dimensions (mm)

Status indicator / night light

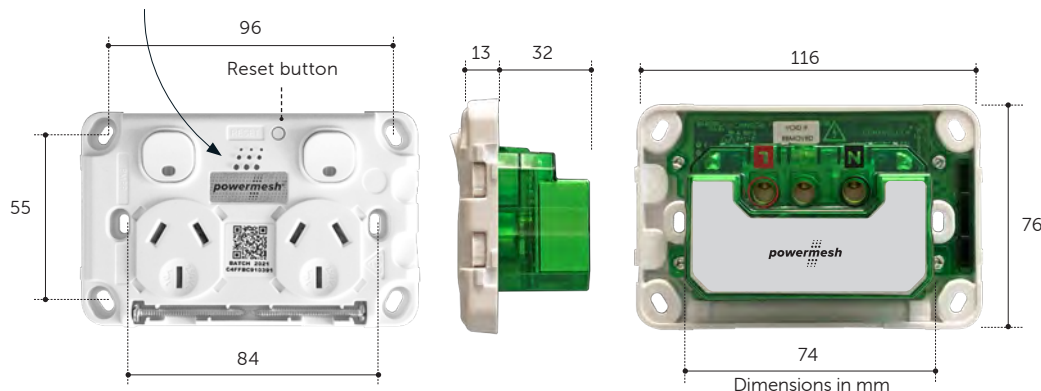

PMPP



PMPPBK

**Standards Approval:**  
AS/NZS3112 & AS/NZS CISPR15

**Certification Number:**  
GMA-510336-EA



### Download Zimi

Scan the code with your phone camera to download.



### \* Zimi Cloud Connect

Enjoy the complete experience of all your Zimi devices with full functionality, reliable connectivity and energy history.



14 Millennium Circuit, Helensvale,  
QLD 4212 Australia. [www.zimi.life](http://www.zimi.life)

Need help?

email [support@zimi.life](mailto:support@zimi.life)  
visit <https://support.zimi.life>