

# Zimi Smoke Connect

## Wireless ZSC-RF



**Smoke Alarm / Photoelectric / Wireless Interconnect**  
**Non Removable 10 Year Lithium Battery**

### Features


- Photoelectric sensing
- Activfire listed
- Complies with AS3786:2014
- The ZSC-RF Wireless Smoke Alarm can pair to ZSC-MW (with ZSC-SS installed)
- Suitable for ceiling or wall mounting
- Low battery warning with silence option
- Red LED alarm status indication
- Multi colour single LED indicator
- Central test & activation button
- Insect screen protects sensing chamber
- 7 Year warranty




### Specifications

Power supply	Built-in DC3V lithium battery. Non replaceable
Battery lifetime	10 years
Operating temperature	0 °C - 45 °C
Relative humidity	5 to $\leq$ 93 %
Silence mode (hush mode)	Yes   Hush time: 10±1 minutes
Caravan & motor home	Not suitable.
Mounting location	Ceiling or wall
Inter-connectable	Yes. Maximum of 7 Zimi Smoke Connect RF (ZSC-RF) can be paired with ZSC-MW (with ZSC-SS installed)
Wireless frequency	433.42MHz
Wireless distance	Maximum 100 metres in free field
Sound pattern	Complies with ISO8201
Alarm volume	$\geq$ 85dB(A) @ 3m

### Dimensions (mm)



### Interconnection

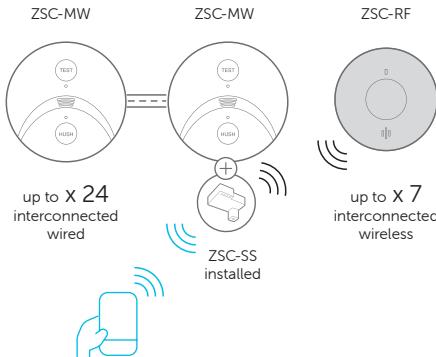

Zimi Limited. 14 Millennium Circuit,  
 Helensvale, QLD 4212 Australia. [www.zimi.life](http://www.zimi.life)

Need help?

email [support@zimi.life](mailto:support@zimi.life)  
 visit <https://support.zimi.life>



**Zimi App**  
 Scan the code  
 to download.



Powermesh products must be installed by a qualified electrician. Zimi requires a compatible (Android, iOS) mobile device, minimum OS requirements are available at [www.zimi.life](http://www.zimi.life). Availability and performance of certain features are service, device and network-dependent and may not be available in all areas; subscription(s) may be required, and additional terms, conditions and/or charges may apply. All features, functionality and other product specifications are subject to change without notice or obligation. Powermesh products are optimised for the use with the Zimi App. The Bluetooth word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. iOS is a trademark or registered trademark of Cisco Inc. Zimi and Powermesh and their respective logos are registered trademarks of Zimi Ltd. Google and Google Play are trademarks of Google LLC. Amazon, Alexa, and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Apple, the Apple logo, Apple Watch and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. Copyright © 2022 Zimi Ltd. All rights reserved.