



# Multi Purpose Switch 4 Button

DATA SHEET

## Features

- Glass touch surface.
- Proximity sense touch pad illumination.
- Colour tuneable touch pads (RGBW).
- Slim magnetic glass fascia.
- Laser engraving option for icons and text.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Bluetooth mesh connectivity with each device acting as a repeater.
- Silverfish antenna technology.
- 2 year warranty.
- Real time energy usage in watts & dollars.
- Auto off timers.
- Automatic schedules.
- Power outage recovery.
- Night light on/off and auto dim.
- Multi way switching of other Zimi devices using Behaviour Link.
- Voice control with your favourite voice assistant.\*


Learn more at [www.zimi.life](http://www.zimi.life)

## Specifications


Product Code	Colour	Description	Rating
SENMPS4	White	Senoa Multi Purpose Switch 4 Button	230V~ 50Hz Max 10A Total
SENMPS4BK	Black		

Load Type per channel	Symbol	Switch rated load
LED drivers & lamps		230W
Incandescent		5A
Fluorescent		2AX
Electronic transformers		2A
Standard iron core & toroidal transformers		2A
Small motors		M.20

## Dimensions (mm)

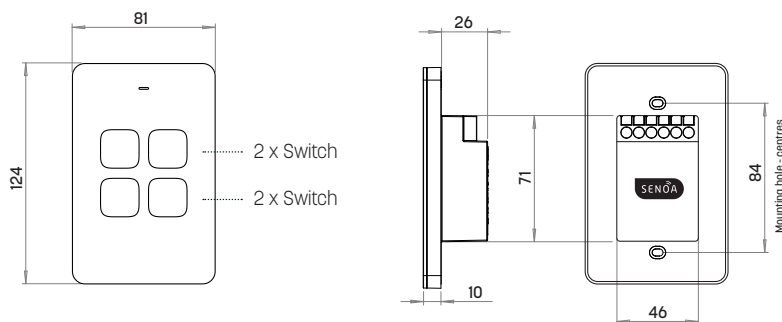

## Wiring Guide



SENMPS4



SENMPS4BK

Standards Approval:  
AS/NZ60669.2.1 & AS/NZS CISPR15

Certification Number:  
GMA-511368-EA



Download Zimi  
Scan the code with your phone camera to download.



## \* Zimi Cloud Connect

Enjoy the complete experience of all your Zimi devices with full functionality, reliable connectivity and energy history.



**zimi** 14 Millennium Circuit, Helensvale, QLD 4212 Australia. [www.zimi.life](http://www.zimi.life)

Need help? email [support@zimi.life](mailto:support@zimi.life)  
visit <https://support.zimi.life>

SENOA products must be installed by a qualified electrician. Zimi requires a compatible (Android, iOS) mobile device, minimum OS requirements are available at [www.zimi.life](http://www.zimi.life). Availability and performance of certain features are service, device and network-dependent and may not be available in all areas; subscription(s) may be required, and additional terms, conditions and/or charges may apply. All features, functionality and other product specifications are subject to change without notice or obligation. SENOA products are optimised for the use with the Zimi App. The Bluetooth word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. IOS is a trademark or registered trademark of Cisco Inc. Zimi and Powermesh and their respective logos are registered trademarks of Zimi Ltd. Google and Google Play are trademarks of Google LLC. Amazon, Alexa, and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Apple, the Apple logo, Apple Watch and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. Copyright © 2022 Zimi Ltd. All rights reserved.



# Multi Dimmer Switch

## 4 Button

DATA SHEET

### Features

- Glass touch surface.
- Proximity sense touch pad illumination.
- Colour tuneable touch pads (RGBW).
- Slim magnetic glass fascia.
- Laser engraving option for icons and text.
- Ripple Smooth™ dimming technology.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Trailing edge dimmer.
- Bluetooth mesh connectivity with each device acting as a repeater.
- Silverfish antenna technology.
- 2 year warranty.
- Touch dimming control.  
Press for on/off  
Hold for dimming  
Double press for full brightness  
Triple press for a timed fade to off.
- Real time energy usage in watts & dollars.
- Auto off timers.
- Automatic schedules.
- Power outage recovery.
- Night light on/off and auto dim.
- Multi way switching of other Zimi devices using Behaviour Link.
- Min and max dimming levels for increased compatibility without flicker.
- Voice control with your favourite voice assistant.\*


Learn more at [www.zimi.life](http://www.zimi.life)

### Specifications


Product Code	Colour	Description	Rating
SENMDS4	White	Senoa Multi Dimmer Switch 4 Button	230V~ 50Hz Max 10A Total
SENMDS4BK	Black		

Load Type per channel	Symbol	Dimmer rated load	Switch rated load
LED drivers & lamps		250W	230W
Incandescent		100W	5A
Fluorescent		×	2AX
Electronic transformers		×	2A
Standard iron core & toroidal transformers		×	2A
Small motors		×	M.20

### Dimensions (mm)

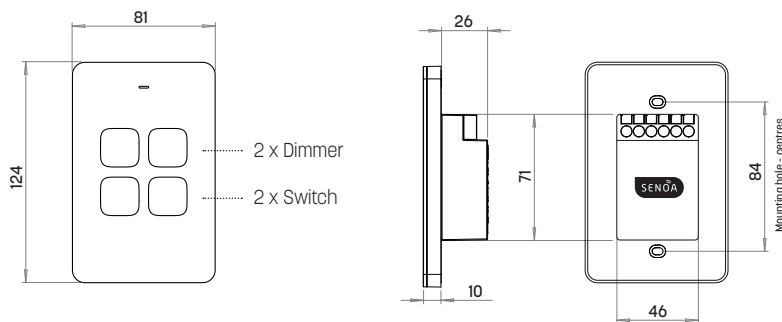

### Wiring Guide



**Standards Approval:**  
AS/NZ60669.2.1 & AS/NZS CISPR15

**Certification Number:**  
GMA-511367-EA



**Download Zimi**  
Scan the code with your phone camera to download.



### \* Zimi Cloud Connect

Enjoy the complete experience of all your Zimi devices with full functionality, reliable connectivity and energy history.



**zimi** 14 Millennium Circuit, Helensvale, QLD 4212 Australia. [www.zimi.life](http://www.zimi.life)

Need help? email [support@zimi.life](mailto:support@zimi.life)  
visit <https://support.zimi.life>

SENOA products must be installed by a qualified electrician. Zimi requires a compatible (Android, iOS) mobile device, minimum OS requirements are available at [www.zimi.life](http://www.zimi.life). Availability and performance of certain features are service, device and network-dependent and may not be available in all areas; subscription(s) may be required, and additional terms, conditions and/or charges may apply. All features, functionality and other product specifications are subject to change without notice or obligation. SENOA products are optimised for the use with the Zimi App. The Bluetooth word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. IOS is a trademark or registered trademark of Cisco Inc. Zimi and Powermesh and their respective logos are registered trademarks of Zimi Ltd. Google and Google Play are trademarks of Google LLC. Amazon, Alexa, and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Apple, the Apple logo, Apple Watch and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. Copyright © 2022 Zimi Ltd. All rights reserved.