

Features

- Glass touch surface.
- Proximity sense touch pad illumination.
- Colour tuneable touch pads (RGBW).
- Slim magnetic glass fascia.
- Laser engraving option for icons and text.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Bluetooth mesh connectivity with each device acting as a repeater.
- Silverfish antenna technology.
- 2 year warranty.
- Real time energy usage in watts & dollars.
- Auto off timers.
- Automatic schedules.
- Power outage recovery.
- Night light on/off and auto dim.
- Multi way switching of other Zimi devices using Behaviour Link.
- Voice control with your favourite voice assistant.*


Learn more at www.zimi.life

Specifications


Product Code	Colour	Description	Rating
SENMP2	White	Senoa Multi Purpose Switch 2 Button	230V~ 50Hz Max 10A Total
SENMP2BK	Black		

Load Type per channel	Symbol	Switch rated load
LED drivers & lamps		230W
Incandescent		5A
Fluorescent		2AX
Electronic transformers		2A
Standard iron core & toroidal transformers		2A
Small motors		M.20

Dimensions (mm)

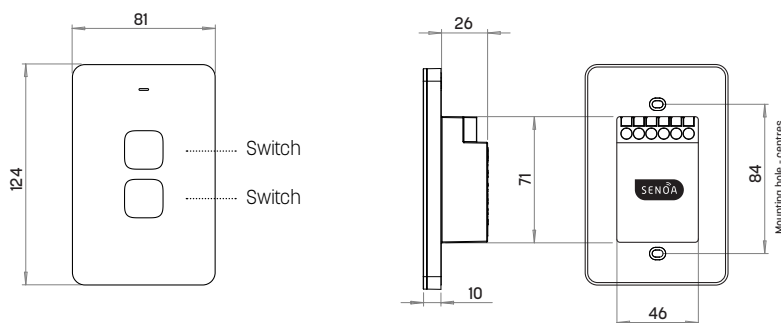

Wiring Guide



SENMP2



SENMP2BK

Standards Approval:
AS/NZ60669.2.1 & AS/NZS CISPR15

Certification Number:
GMA-511368-EA



Download Zimi
Scan the code with
your phone camera
to download.



* Zimi Cloud Connect

Enjoy the complete
experience of all
your Zimi devices
with full functionality,
reliable connectivity
and energy history.

