

Features

- Glass touch surface.
- Proximity sense touch pad illumination.
- Colour tuneable touch pads (RGBW).
- Slim magnetic glass fascia.
- Laser engraving option for icons and text.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Bluetooth mesh connectivity with each device acting as a repeater.
- Silverfish antenna technology.
- 2 year warranty.
- Real time energy usage in watts & dollars.
- Auto off timers.
- Automatic schedules.
- Power outage recovery.
- Night light on/off and auto dim.
- Multi way switching of other Zimi devices using Behaviour Link.
- Voice control with your favourite voice assistant.*

Learn more at www.zimi.life




Specifications


Product Code	Colour	Description	Rating
SENMPS4	White	Senoa Multi Purpose Switch 4 Button	230V~ 50Hz Max 10A Total
SENMPS4BK	Black		

Load Type per channel	Symbol	Switch rated load
LED drivers & lamps	💡	230W
Incandescent	💡	5A
Fluorescent	💡	2AX
Electronic transformers	💡	2A
Standard iron core & toroidal transformers	💡	2A
Small motors	Ⓜ	M.20

Dimensions (mm)

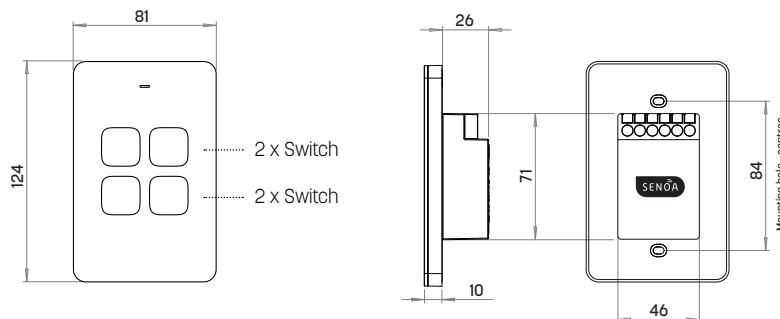

Wiring Guide



SENMPS4



SENMPS4BK

Standards Approval:
AS/NZ60669.2.1 & AS/NZS CISPR15

Certification Number:
GMA-511368-EA



Download Zimi

Scan the code with
your phone camera
to download.



* Zimi Cloud Connect

Enjoy the complete
experience of all
your Zimi devices
with full functionality,
reliable connectivity
and energy history.



14 Millennium Circuit, Helensvale,
QLD 4212 Australia. www.zimi.life

Need help?

email support@zimi.life
visit <https://support.zimi.life>