



Multi Purpose Switch

6 Button

DATA SHEET

Features

- Glass touch surface.
- Proximity sense touch pad illumination.
- Colour tuneable touch pads (RGBW).
- Slim magnetic glass fascia.
- Laser engraving option for icons and text.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Bluetooth mesh connectivity with each device acting as a repeater.
- Silverfish antenna technology.
- 2 year warranty.
- Real time energy usage in watts & dollars.
- Auto off timers.
- Automatic schedules.
- Power outage recovery.
- Night light on/off and auto dim.
- Multi way switching of other Zimi devices using Behaviour Link.
- Voice control with your favourite voice assistant.*


Learn more at www.zimi.life

Specifications


Product Code	Colour	Description	Rating
SENMP56	White	Senoa Multi Purpose Switch 6 Button	230V~ 50Hz Max 10A Total
SENMP56BK	Black		

Load Type per channel	Symbol	Switch rated load	Spare Buttons
LED drivers & lamps		230W	Behaviour Link
Incandescent		5A	
Fluorescent		2AX	
Electronic transformers		2A	
Standard iron core & toroidal transformers		2A	
Small motors		M.20	

Dimensions (mm)

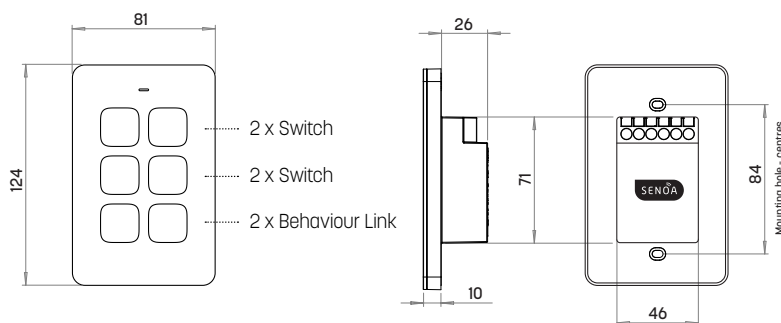

Wiring Guide



14 Millennium Circuit, Helensvale,
QLD 4212 Australia. www.zimi.life

Need help?

email support@zimi.life
visit <https://support.zimi.life>

SENMP56



SENMP56BK



Standards Approval:

AS/NZ60669.2.1 & AS/NZS CISPR15

Certification Number:

GMA-511368-EA



Download Zimi

Scan the code with
your phone camera
to download.



* Zimi Cloud Connect

Enjoy the complete
experience of all
your Zimi devices
with full functionality,
reliable connectivity
and energy history.



SENŌA products must be installed by a qualified electrician. Zimi requires a compatible (Android, iOS) mobile device, minimum OS requirements are available at www.zimi.life. Availability and performance of certain features are service, device and network-dependent and may not be available in all areas; subscription(s) may be required, and additional terms, conditions and/or charges may apply. All features, functionality and other product specifications are subject to change without notice or obligation. SENŌA products are optimised for the use with the Zimi App. The Bluetooth word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. iOS is a trademark or registered trademark of Cisco Inc. Zimi and Powermesh and their respective logos are registered trademarks of Zimi Ltd. Google and Google Play are trademarks of Google LLC. Amazon, Alexa, and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Apple, the Apple logo, Apple Watch and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. Copyright © 2022 Zimi Ltd. All rights reserved.