


## Features

- NDIS compliant touch pad size (>35mm wide).
- Glass touch surface.
- Proximity sense touch pad illumination.
- Colour tuneable touch pads (RGBW).
- Slim magnetic glass fascia.
- Laser engraving option for icons and text.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Bluetooth mesh connectivity with each device acting as a repeater.
- Silverfish antenna technology.
- 2 year warranty.
- Automatic schedules.
- Auto off timers.
- Real time energy usage in watts & dollars.
- Power outage recovery.
- Night light on/off and auto dim.
- Multi way switching of other Zimi devices with Behaviour Link.
- Voice control with your favourite voice assistant.\*

*Learn more at [www.zimi.life](http://www.zimi.life)*



## SNASMPS3




## SNASMPS3BK

## Specifications


Product Code	Colour	Description	Rating
SNASMPS3	White	Senoa Accessibility Multi Purpose Switch	230V~ 50Hz Max 10A Total
SNASMPS3BK	Black		

Load Type per channel	Symbol	Switch rated load
LED drivers & lamps		230W
Incandescent		5A
Fluorescent		2AX
Electronic transformers		2A
Standard iron core & toroidal transformers		2A
Small motors		M.20

## Dimensions (mm)

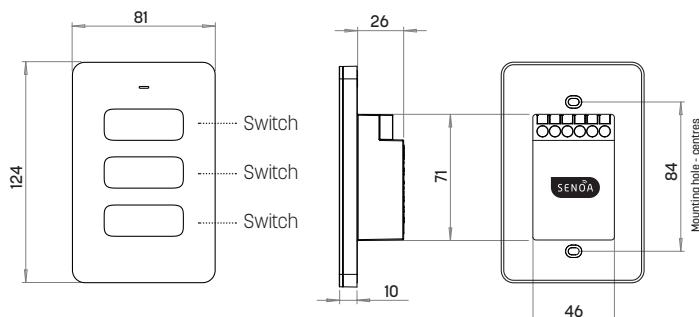

## Wiring Guide



**Standards Approval:**  
AS/NZ60669.2.1 & AS/NZS CISPR15

**Certification Number:**  
GMA-511368-EA



**Download Zimi**  
Scan the code with  
your phone camera  
to download.



## \* Zimi Cloud Connect

Enjoy the complete  
experience of all  
your Zimi devices  
with full functionality,  
reliable connectivity  
and energy history.



## Features

- NDIS compliant touch pad size (>35mm wide).
- 1 x Dimmer and 2 x Switches.
- Ripple Smooth™ dimming technology.
- Trailing edge dimmer.
- Glass touch surface.
- Proximity sense touch pad illumination.
- Colour tuneable touch pads (RGBW).
- Slim magnetic glass fascia.
- Laser engraving option for icons and text.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Bluetooth mesh connectivity with each device acting as a repeater.
- Silverfish antenna technology.
- 2 year warranty.

- Touch dimming control.  
Press for on/off  
Hold for dimming  
Double press for full brightness  
Triple press for a timed fade to off.
- Automatic schedules.
- Auto off timers.
- Real time energy usage in watts & dollars.
- Power outage recovery.
- Night light on/off and auto dim.
- Min and max dimming levels for increased compatibility without flicker.
- Multi way switching of other Zimi devices with Behaviour Link.
- Voice control with your favourite voice assistant.\*


Learn more at [www.zimi.life](http://www.zimi.life)

## Specifications


Product Code	Colour	Description	Rating
SNASMDS3	White	Senoa Accessibility Multi Dimmer Switch	230V~ 50Hz Max 10A Total
SNASMDS3BK	Black		

Load Type per channel	Symbol	Dimmer rated load	Switch rated load
LED drivers & lamps	▶	250W	230W
Incandescent	●	100W	5A
Fluorescent	—	✗	2AX
Electronic transformers	□	✗	2A
Standard iron core & toroidal transformers	■	✗	2A
Small motors	Ⓜ	✗	M.20

## Dimensions (mm)

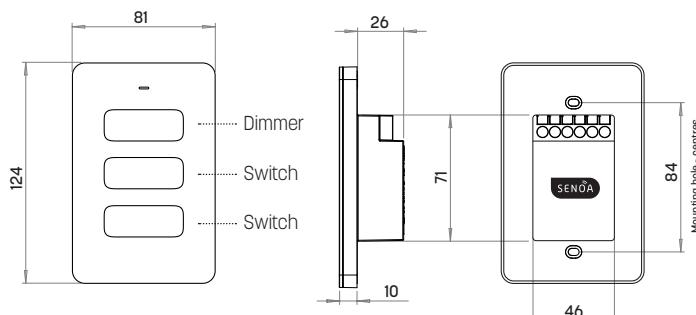

## Wiring Guide



14 Millennium Circuit, Helensvale,  
QLD 4212 Australia. [www.zimi.life](http://www.zimi.life)

Need help?

email [support@zimi.life](mailto:support@zimi.life)  
visit <https://support.zimi.life>



SNASMDS3



SNASMDS3BK

**Standards Approval:**  
AS/NZ60669.2.1 & AS/NZS CISPR15

**Certification Number:**  
GMA-511367-EA



Bluetooth®

## Download Zimi

Scan the code with  
your phone camera  
to download.



## \* Zimi Cloud Connect

Enjoy the complete  
experience of all  
your Zimi devices  
with full functionality,  
reliable connectivity  
and energy history.



works with  
Hey Google



works with  
Alexa