MERJ6ACM
MERJ6ACMBK
MERJ6ACMTT

See currrent catalogue for further detail

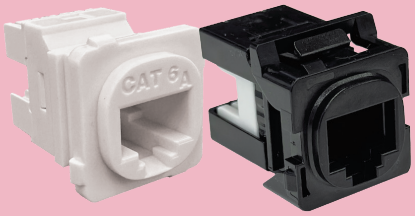

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Registered Cat 6A Cable Clip Mech and 6A Cable Clip Mech Termination Tool

- The MERJ6ACM registered jack (RJ-45 style) is perfect for ethernet connecting hardware applications in the office or at home and provides Cat 6A performance, capable of supporting data transfer rates up to 10Gbps at a maximum bandwidth of 500MHz.
- Tested in accordance and complies with AS/CA S008 2020
- Complies with IEC60603-7 section 5.7 connecting hardware, including plugs and sockets of all designs.
- Complies with IEC 60603-7 Clause 6.4.2 for Voltage proof where connecting hardware shall have dielectric withstand capability of 1.5kV for 60 s.
- Complies with IEC 60512, Test 4a for 1000 VDC or AC peak contact to all contacts.
- Complies with IEC 60512, Test 4a for 1500 VDC or AC peak all contact to shield.
- Suitable for termination using a 110 tool or MERJ6ACMTT, quick cable clip termination tool as shown in instructions. (Note: this model does not suite a Krone tool termination)
- Kit comes with cable clip that is compatible with TRADER wall plate apertures.
- Available colour: White, MERJ6ACM also available in Black.

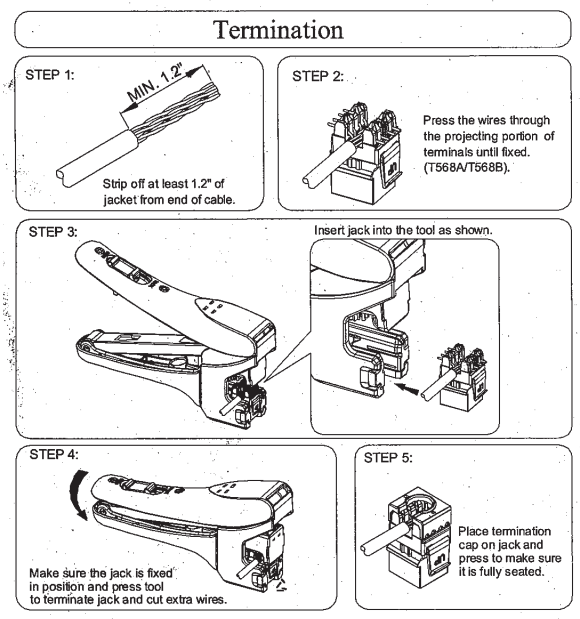

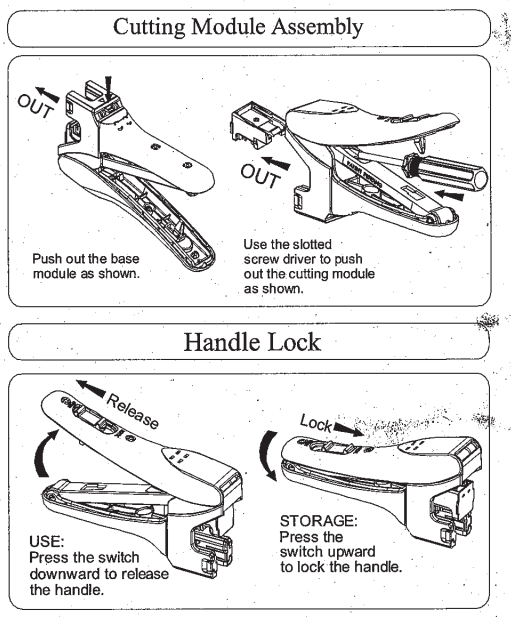

Catalogue Number	Description
MERJ6ACM	Data Outlet RJ45 Jack Clip in Mechanism Cat 6A White
MERJ6ACMBK	Data Outlet RJ45 Jack Clip in Mechanism Cat 6A Black
MERJ6ACMTT	Data Outlet Termination Tool for MERJ6ACM Cat 6A Clipin Mechanism

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 | E: service@gsme.com.au
www.gsme.com.au

100% AUSTRALIAN TRADER OWNED & OPERATED

10 Yr Warranty TRADER