

PUPP2GVPTR

*See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.


Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



Power Point Switched 2 Gang Double Pole Shuttered 10A 250V~ Vandal Proof Transparent

- Power points have Shutters and are Double Pole.
- Oval screw caps for extra adjustment on wall (no removable cover).
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 5.7mm bore to suit 4 x 2.5mm² cable.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Shutter operates from either earth or neutral
- Power points approved to AS/NZS3112.
- Typical example of size seen below:

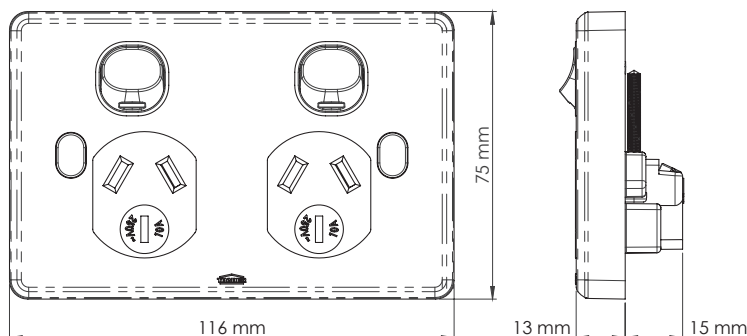

Front

Back

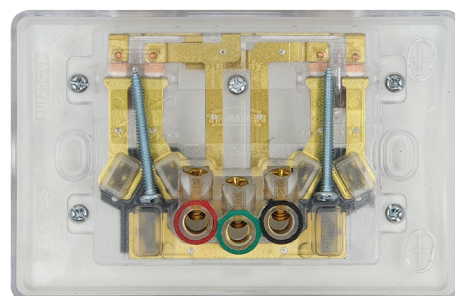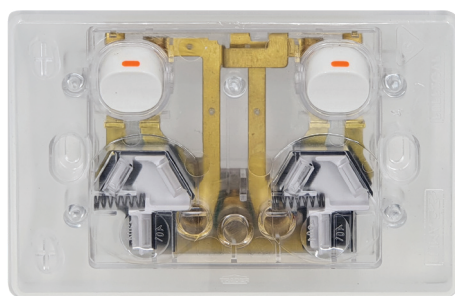

Catalogue Number	Description
PUPP2GVPTR	Power Point Switched 2 Gang, 10A 250V~ Shuttered, Double Pole, VANDAL PROOF, Transparent

Certification Number: GMA-505204-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

www.gsme.com.au



Data Specification Sheet
October 2022