

## SCDLMAX



### Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.




## Scorpion LED Downlight 5W, 7W, 9W


- Dimmable
- Colour and power selectable
- Body colour is white
- Shell standard colour is white
- IC-4 rated can be covered and abutted - See instructions
- Flex and Plug - cable length 1.2 metres for easier installations
- Integrated driver
- Diffused lens
- *Warranty covers 5 Years Residential & 3 Years Commercial*

### Product Specification

Part Code	SCDLMAX
Colour Temp	3000K
	3500K
	4000K
	5000K
	6000K
Lumen Output	5W - 500LM
	7W - 700LM
	9W - 900LM
IP Rating	IP44 (from front only) IP20 (from rear)
Power	5W, 7W, 9W
Beam Angle	110°
CRI	>90
Voltage Rating	220-240V~ 50Hz
LED Lamp Life (L70)	30,000 Hrs
Dimmable	Yes
Operating Temp	-10°C to 40°C
Electrical Class	Class II

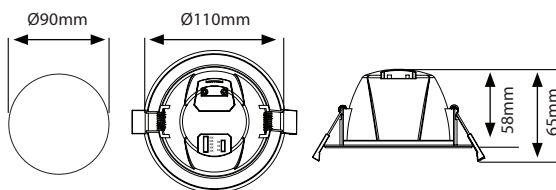

C Plane Distribution Diagram

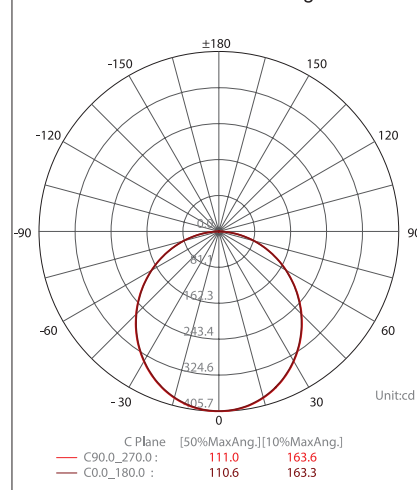

### Dimming

The Scorpion Downlights have been designed for optimum performance with our Dimpala range of dimmers:

DIMR - Dimpala Universal Eclipse Dimmer // DIMPRX - Dimpala Push Rotary Dimmer No Glow // DIMPR - Dimpala Push Rotary Dimmer

Please refer to our Website or Catalogue for further detail and accessories

*Note: In some regions a slight flicker may occur when the luminaire is dimmed. This could be due to power line signals sent by electricity supply utilities. This effect is not a malfunction of the luminaire or dimmer but could be a result of local power supply changes. If this occurs at any stage adjusting the dimmer back to maximum output should minimise the effect.*

### Certification Number:

GMA-520876

### GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

[www.gsme.com.au](http://www.gsme.com.au)

