

FLPP2GAU

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.



It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Double Power Points (Auto Switched)

- Uses brass terminals that have the screws backed out for easier installation of cabling. Power point terminals have Square wrapped terminals to suit 4 x 2.5mm² cable.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is white. Black, Matt White and Matt Black also stocked please check availability.
- Power points approved to AS/NZS3112.
- Active is auto switched.
- Shuttered.
- Typical example of size seen below:

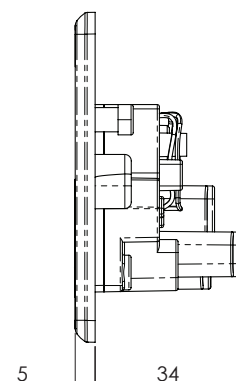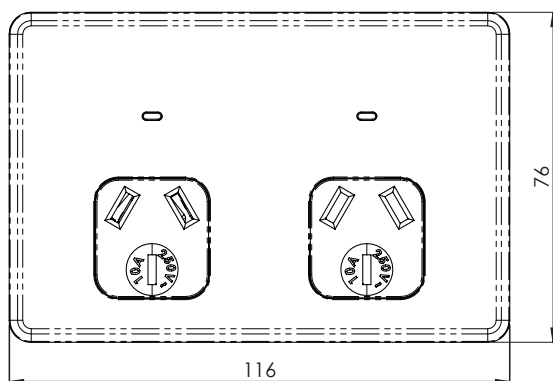

Catalogue Number	Description
FLPP2GAU	Power Point Auto Switched 2 Gang 10A 250V ac White

When ordering **BLACK** product add "BK" at end of catalogue number, ie FLPP2GAUBK

When ordering **MATT BLACK** product add "MBK" at end of catalogue number, ie FLPP2GAUMBK

When ordering **MATT WHITE** product add "MW" at end of catalogue number, ie FLPP2GAUMW

Certification Number:

GMA-511520-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au

