


CLPP1GMW CLPP1GMBK

*See current catalogue for further detail

Clouded Leopard Range of Single Power Points

- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 6mm bore to suit 4 x 2.5mm² cable. Switch terminals have 4.1mm suit 4 x 1.5mm².
- Combination head screws for the power point terminals.
- Uses 'Cat Flap' screw covers for IP rating mounting screws.
- Dolly indicator colour green.
- Power points approved to AS/NZS3112.
- Typical example of size seen below:

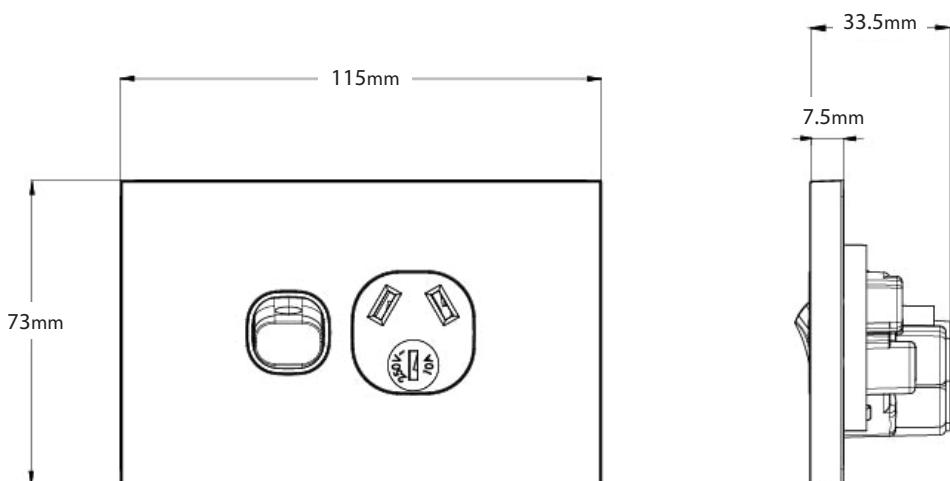

Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



Catalogue Number	Description
CLPP1GMW	Power Point Switched 1 Gang, 10A 250V~ Matt White
CLPP1GMBK	Power Point Switched 1 Gang, 10A 250V~ Matt Black

When ordering MATT BLACK replace "MW" (Matt White) with "MBK" at end of catalogue number, ie CLPP2GMW to CLPP2GMBK.

MEERKAT 

MEERKAT Rocker Switch Mechanisms are used for all switch plates.
Please refer to Meerkat Rocker Mech Matrix for range compatibility.

Certification Number:
GMA-500349-EA

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gmse.com.au
www.gmse.com.au

