

## HPAI HPAIBK

\*See current catalogue for further detail



HPAI



HPAIBK

### Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.


It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

## Hippo Appliance Inlets, 250V~ 15A

- These weatherproof appliance inlet are ideal for caravans or powering relocatable buildings.
- It is rated at 15A 250V ~ to provide adequate power input capability to cover accessories and equipment used in most portable dwellings.
- The HPAI has insulated safety pins to prevent accidental electrical contact and a recess placed in the inlet to allow the acceptance of a 15A shrouded cord extension socket.
- The flap on the HPAI is designed to be able to close over standard extension sockets and provide an adequate weather protection rating to IP34.
- The flap contains a flexible seal that hugs over the cable to help maintain the IP rating while it is in use.
- The product comes with a foam gasket for sealing against the mounting surface and a separate mounting flange for use in cases where wall panelling is thin and wiring space is limited.
- UV stabilised polycarbonate to resis yellowing from sunlight.
- Standard colour is White. Also available in Black - please check availability.
- Terminals are suited for 1.5mm<sup>2</sup> or 2.5mm<sup>2</sup> cables.

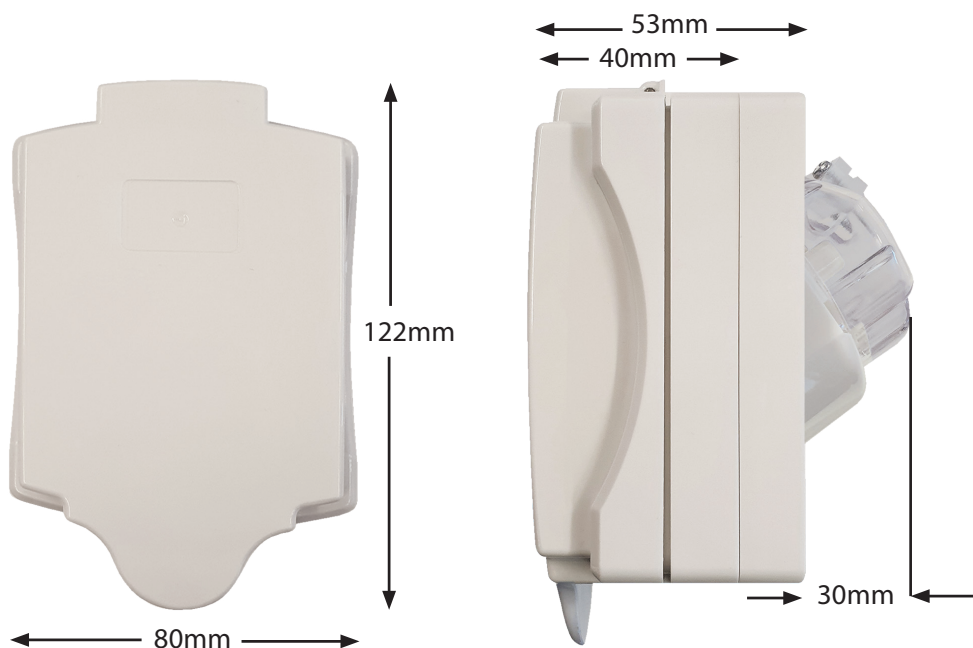

Catalogue Number	Description
HPAI	Appliance Inlet 250V~ 15A IP34
HPAIBK	Appliance Inlet 250V~ 15A IP34, Black

**Certification Number:**  
GMA-508578

**GSM Electrical (Australia) Pty Ltd**  
Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au  
[www.gsme.com.au](http://www.gsme.com.au)



Data Specification Sheet  
June 2021