

HPSW1G
HPSW1GI
HPSW1GL
HPSW2G
HPSW2GL
HPSW3GL

*See current catalogue for further detail

Cleaning Guide:


Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Hippo Range of Switches

- 16AX/20A 250V ac rated modular weatherproof switches.
- Heavy duty switch mechanism with additional mech securing screws.
- HPSW1GI is populated with an intermediate switch.
- The Hippo product including dummies, is made from UV Stabilised Polycarbonate to avoid discolouring.
- Switches are single pole two way with looping terminal.
- IP66 ideal for prevention against water or harmful objects that may compromise conventional light switches. Perfect for use in exterior applications, or damp/dusty environments such as building exteriors, carports, gardens or workshops.
- Styling matches the rest of the Trader Hippo family of products.
- Back mounting boxes that contain 20mm and 25mm plain entries.
- UV stabilised
- Colours available include Grey or Black.

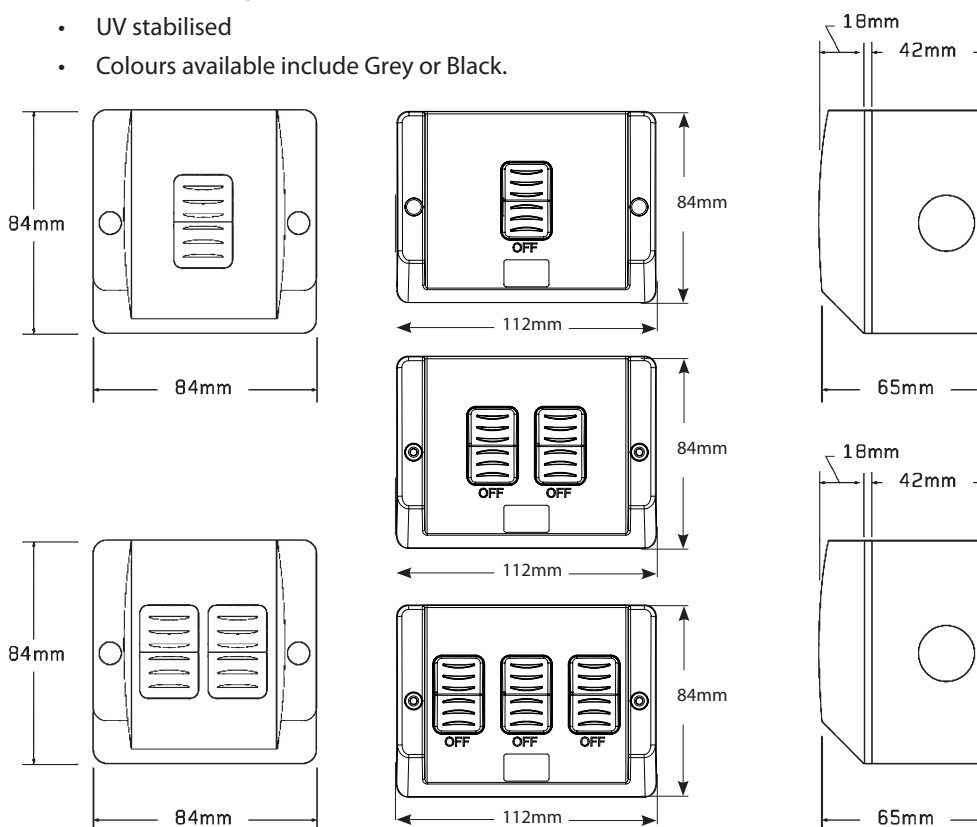

Catalogue Number	Description
HPSW1G	Switch Weatherproof Single For Outdoor Use IP66 16AX/20A
HPSW1GI	Switch Weatherproof Single Intermediate IP66 10A 250V ac
HPSW1GL	Switch Weatherproof Single For Outdoor Use IP66 16AX 20A 250V with Large Back Box
HPSW2G	Switch Weatherproof Double For Outdoor Use IP66 16AX/20A
HPSW2GL	Switch Weatherproof Double For Outdoor Use IP66 16AX 20A 250V with Large Back Box
HPSW3GL	Switch Weatherproof Triple For Outdoor Use IP66 16AX 20A 250V with Large Back Box

When ordering BLACK product add "BK" at end of catalogue number, ie HPSW1GBK

Certification Number:

HPSW1G & HPSW2G: GMA-508435-EA

HPSW1GL, HPSW2GL, HPSW3GL: GMA-519258-EA

HPSW1GI: TBC

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

www.gsme.com.au



Data Specification Sheet
March 2025