

## HY1GPWB HY1GPWBR

\*See current catalogue for further detail

### Page 1 of 2

## Hyena Wall Boxes

- Sturdy polycarbonate construction and well insulated.
- HY1GPWBR features 7.5mm recessed internal rim for suitability of slim plate ranges to provide more room at the front region of the box aperture
- Strengthened corner features to prevent breakage when hammering into brick recesses.
- Self-gripping claws for sturdy attachment in brickwork.
- Sliding nuts at 84mm centers with protective tape to prevent concrete slurry or dust entering the threads until they are needed for use by the electrician.
- Ideally suited for Trader Flat Cat, Leopard and Cheetah sockets to provide additional space for shallow plate socket features.

#### Knock-outs/entries:

Rear 1 x 25, 1 x (35 Square)




L/H Side 1 x 20, 1x 25

R/H Side 1 x 20, 1x 25

Bottom 2 x 25, 1 x (24x14)

Top 2 x 25, 1 x (24x14)

#### HY1GPWBR

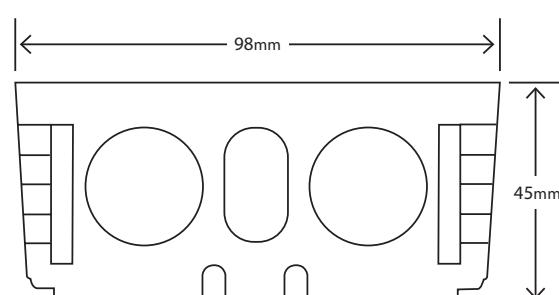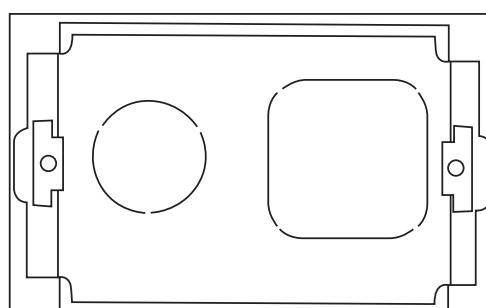

Catalogue Number	Description
HY1GPWB	Plastic Wall Box 1 Gang with Sliding Nuts
HY1GPWBR	Plastic Wall Box Recessed 1 Gang with Sliding Nuts



#### GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
 P: 1300 301 838 F: 1300 301 778 E: [service@g sme.com.au](mailto:service@g sme.com.au)  
[www.g sme.com.au](http://www.g sme.com.au)



## HY1GPWB HY1GPWBR HYWBR

\*See current catalogue for further detail

### Page 2 of 2

## Hyena Wall Boxes

### Features:

- Constructed to organize wiring coming out of the wall.
- Suitable for installing power points to the flat screen TV or AV installations, telephone/IT point, etc.
- Space saver whilst keeping cables neat & tidy.
- Fits standard power point or wall plate and has two AV apertures.
- Product includes a wall box, face plate, 2 empty bezels and 2 blanking inserts.
- Easy fitting, no brackets required.

### Specification:

- Face plate dimension: 185 x 145 mm with 130 x 90mm opening.
- Box Internal dimension: 120 x 82 x 60mm.
- Box Hole Cut-out dimension: 166 x 100mm.
- Box Depth dimension: 63 mm.
- Wall thickness: 8 mm to 20mm.
- Suitable for 70 & 90mm wall cavities.
- Suitable for Plaster Board only, not suitable for Masonry.



Catalogue Number	Description
HYWBR	Wall Box Recessed for Power Point and AV Feeds X2 Behind Televisions

