

## WOSOAUDP10 WOSOAUDP15

\*See current catalogue for further detail

### Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



## DIN Mounted Socket

DIN mounted socket designed for easy installation on a DIN rail.

These sockets suit 3 pin plugs for either 10A or 15A 250Vac rating and provides a reliable and secure connection for your electrical devices.

### Features:

- 3 Flat Pin
- Available in 10A or 15A options
- Auto switched double pole

### Neon Indication

To provide indication that supply is present when plugs are inserted, all products are supplied with a neon indication.

### Safety Shutters

To prevent accidental insertion into live contacts all WOSOAUDP series DIN Socket Outlets are manufactured with safety shutters.

### Double Pole Auto Switched


The Din Socket Outlets have double pole construction which incorporates auto switching across active and neutral contacts which makes them versatile for applications such as work sites in temporary boards and portable generators.

### Connection

Installation and connection have been designed so that the active terminal is loaded from the bottom position in line with other MCB and busbar active terminations and the screw positions are front mounted in a similar layout for time saving front access (see images below). This reduces the need to unclip the product and wire it from the rear as other in the market must be done. The top positioned Neutral & Earth connections place them close to the MEN for ease of wiring in smaller boards which all helps with reducing installation time.

### DIN Rail Mounting

All WOSOAUDP series products are supplied with a robust DIN clip, providing strong grip to the DIN rail when removing plugs from extension cords are the if the sockets need strong mounting strength if used on work sites.

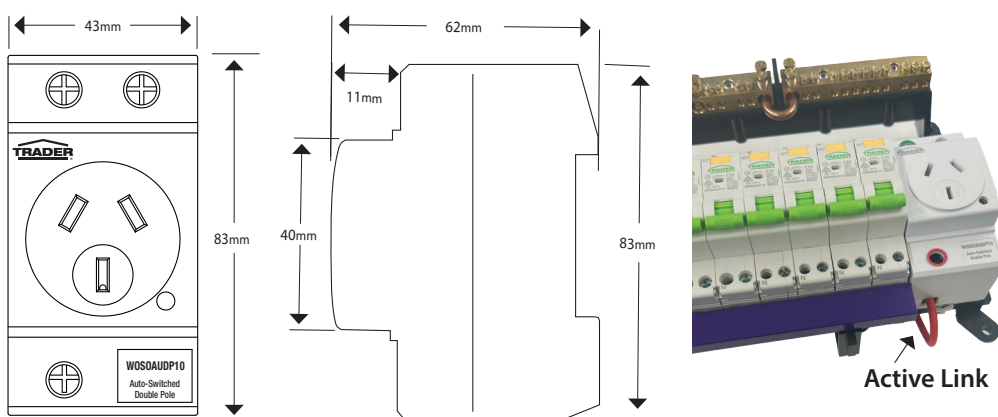

Catalogue Number	Description
WOSOAUDP10	Socket DIN Rail Mounted Auto-Switched Double Pole 10A 250V 3 Flat Pin
WOSOAUDP15	Socket DIN Rail Mounted Auto-Switched Double Pole 15A 250V 3 Flat Pin

### Certification Number:

GMA-518295-EA

### GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

[www.gsme.com.au](http://www.gsme.com.au)



Data Specification Sheet  
240522